




26 pcs of Cable tie

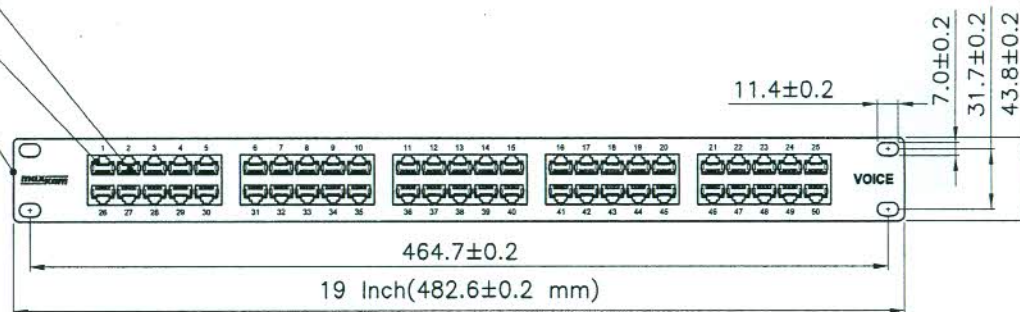

Ground Cable

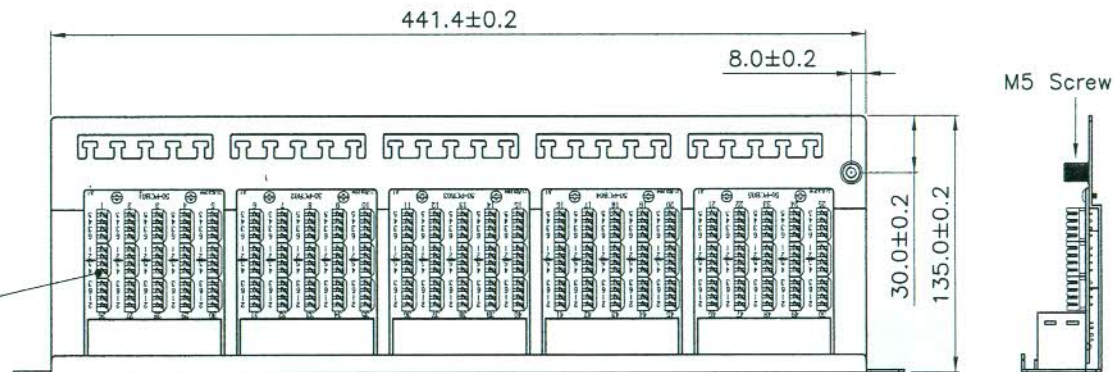

Specification :

Material :

1. Panel : SECC, 1.5mm thickness with Black color painted.
2. RJ45 Jack Housing : ABS, UL 94V-0.
3. RJ45 Jack contact :
 - 3-1. Material : Phosphor Bronze with Nickel plated.
 - 3-2. Finish : 6 micro-inch Gold plated on Plug contact area.
4. IDC :
 - 4-1. Housing : PC+Glass Fiber, UL 94V-2.
 - 4-2. Terminal : Phosphor Bronze with Tin plated.
5. Ground Cable : 18 AWG Wire, with green/yellow striped color, length 40 cm.

Performance :

- a. Insertion force : 20N max. (IEC 60603-7-4)
- b. Retention strength : 7.7 kgs between Jack and Plug.
- c. Operating temperature : -10°C to 60°C. (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
- d. Durability :
 - *Jack : 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4)
 - *IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with Krone punch down tool.

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	12.AUG.2010	QIQI	
	CHECK	12.AUG.2010	DAY	
	APPROVAL	12.AUG.2010	JAIMY	
	DATE	NAME	ITEM NO.:	
SCALE	1/4 (A4)	UNIT	mm	DES.: 50 PORT VOICE PATCH PANEL
	DRAWING NO.			
	DRAWING CLASSIFICATION	S	SHEET	1 OF 1

