

# Category 6 U/UTP 24AWG EuroClass Cca Cables

Datasheet: GD105076v2




## APPLICATION

Leviton's Category 6 U/UTP 24AWG cables meet Category 6 performance standards. They are rated to 250MHz and are suitable for use in all Class E structured wiring cable systems. This cable supports Gigabit Ethernet, Power over Ethernet, voice, and broadband video transmissions at frequencies up to 250MHz.

## FEATURES AND BENEFITS

- 24 AWG solid annealed copper wire
- Polyolefin core Insulation
- 4 unshielded twisted pairs cabled together
- Designed to support all class E protocols including Gigabit Ethernet
- HFFR-LS\* jacket enables the cable to meet the requirements of the Construction Products Regulation (CPR) EuroClass Cca
- Included in the Leviton 25 Year System Warranty when used in conjunction with Leviton copper connectivity. System warranties available for qualified projects installed by certified contractors

\* Halogen Free Flame Retardant – Low Smoke

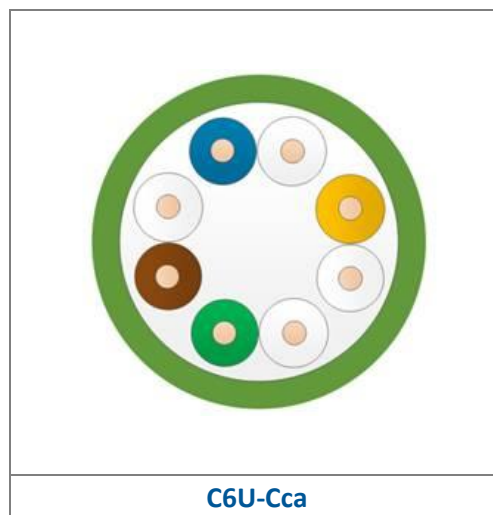

## STANDARDS

- Designed and constructed to give optimum electrical performance to the following standards:
  - ISO/IEC 11801 Class E, IEC 61156-5
  - EN50173-1 and EN 50288-6-1
  - ANSI/TIA 568.2-D
- Supports Gigabit Ethernet
- Recommended for PoE standards:
  - IEEE 802.3bt PoE Type 1 (15.4 Watts) formerly 802.3af
  - IEEE 802.3bt PoE Type 2 (30 Watts) formerly 802.3at
  - IEEE 802.3bt PoE Type 3 (60 Watts)
  - IEEE 802.3bt PoE Type 4 (90 Watts)
  - Cisco UPoE (60 Watts)
  - Cisco UPoE+ (90 Watts)
  - Power over HDBaseT™ PoH (95 Watts)

## REACTION TO FIRE

CHARACTERISTIC	STANDARD	RATING
Single Cable Flame Rating	IEC/EN 60332-1-2	Pass
Acid Gas Emission / Acidity	EN 50267-2-3	Pass
Classification / EuroClass	EN 13501-6	C <sub>ca</sub> s1a d1 a1

# Category 6 U/UTP 24AWG EuroClass Cca Cables

Datasheet: GD105076v2



## PRIMARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Conductor Loop Resistance	Max 19 Ω / 100m	16 Ω / 100m
Conductor Resistance Unbalance	Max 2%	0.1%
Insulation Resistance	>5GΩ.km	>50GΩ.km
Dielectric Strength	2500 Vdc/2secs	Pass

## SECONDARY ELECTRICAL PARAMETERS

CHARACTERISTIC	SPECIFICATION	TYPICAL PERFORMANCE @ 20°C
Velocity of Propagation	<534nsec/100m @ 100MHz	490nsec/100m @ 100MHz
Delay Skew	Max 45nsec/100m @100MHz	30nsec/100m @ 100MHz
Mean Characteristic Impedance	100Ω +/- 5Ω @ 100MHz	100Ω ± 3Ω @ 100MHz
Transverse Conversion Loss (TCL)	≥50-10log(f)dB	61dB @ 10MHz

## ELECTRICAL PERFORMANCE

Frequency (MHz)		1	4	10	20	100	200	250
Insertion Loss (dB/100m)	Standard	2.0	3.8	6.0	8.5	19.8	29.0	32.8
	Standard	75.3	66.3	60.3	55.8	45.3	40.8	39.3
NEXT (dB)	Standard	72.3	63.3	57.3	52.8	42.3	37.8	36.3
	Standard	67.8	58.0	50.0	44.0	30.0	24.0	22.0
PSNEXT (dB)	Standard	64.8	55.0	47.0	41.0	27.0	21.0	19.0
	Standard	N/A	23.0	25.0	25.0	20.1	18.0	17.3
ACR-F (dB)	Standard							
	Standard							
PSACR-F (dB)	Standard							
	Standard							
Return Loss (dB)	Standard							
	Standard							

## INSTALLATION

Temperature (Installation)	0°C to +50°C	Min Bend Radius (Installation)	8 x Outer diameter
Temperature (Operation)	-20°C to +60°C	Min Bend Radius (Operation)	4 x Outer Diameter
Max Tensile Load (Installation)	10kg	Field Test NVP Value	0.68
Segregation Class	Class B	Nominal Jacket Wall Thickness (mm)	0.8

# Category 6 U/UTP 24AWG EuroClass Cca Cables

Datasheet: GD105076v2



## STANDARD PACKAGING SPECIFICATIONS - REELS

Part Number	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Reel Size Flange x width (mm)	Gross Weight (kg/Item)	Items Per Double Pallet
C6U-Cca-500GN4	500	Green†	5.8	41.0	400 x 320	22.5	36

## STANDARD PACKAGING SPECIFICATIONS - BOXES

Part Number	Packaging Length (m)	Color	Nominal Cable Diameter (mm)	Nominal Cable Weight (kg/km)	Box Size L x W x H (mm)	Gross Weight (kg/Item)	Items Per Double Pallet
C6U-Cca-B305GN4	305	Green†	5.8	41.0	405 x 265 x 372	13.2	45

†Also available in a range of non-standard colors

## COUNTRY OF ORIGIN

COO: United Kingdom

*“Leviton is **dedicated to designing, developing, and manufacturing** sustainable **high performance** structured cabling and specialty cabling solutions.”*

The information contained in this document is valid and correct at the time of issue. Leviton reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.